


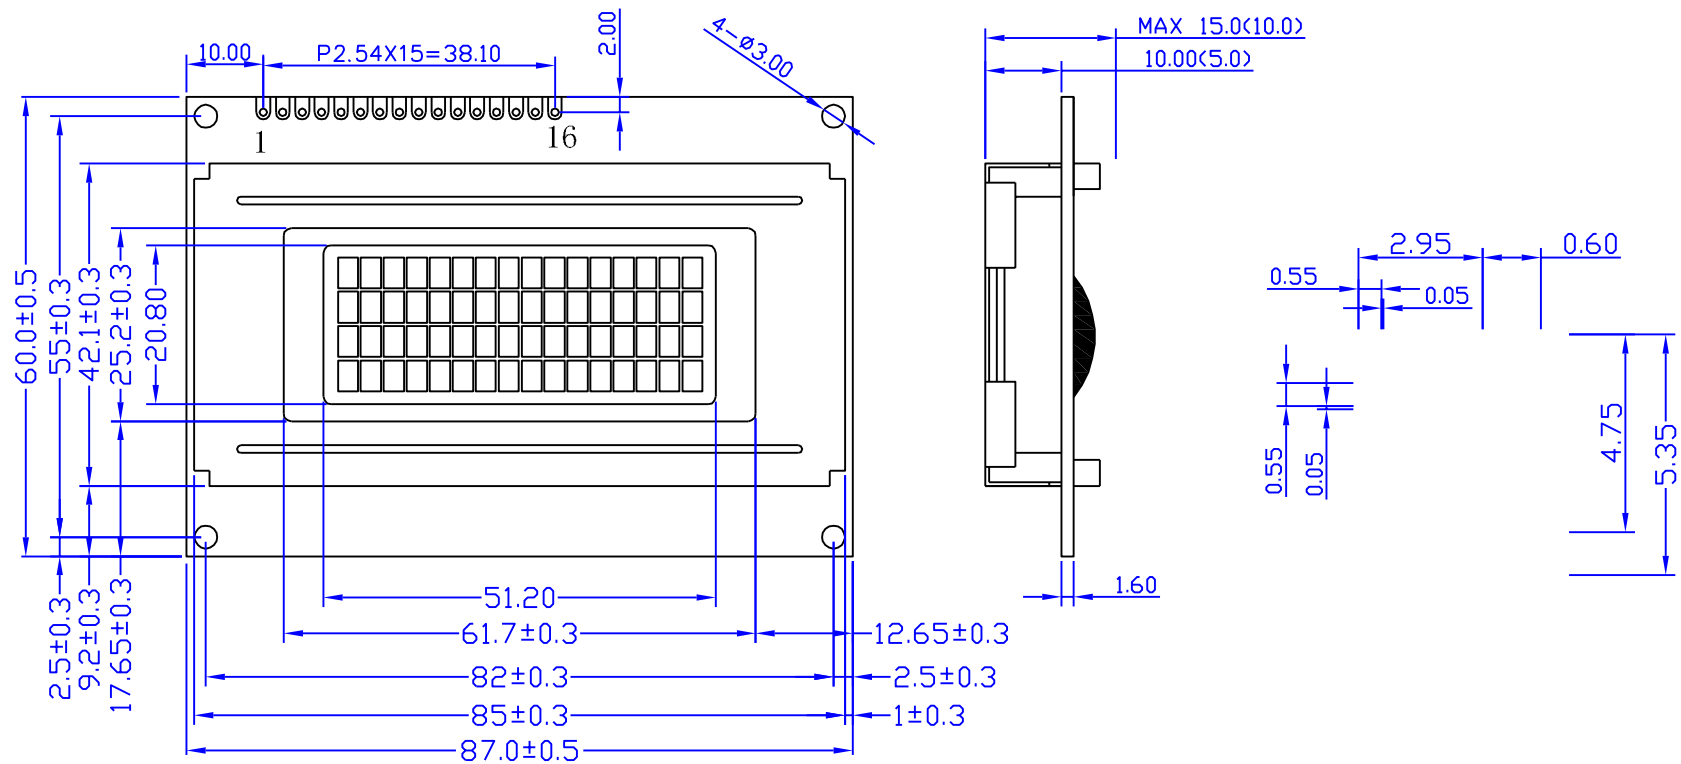

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
GND	VDD	VLCD	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	A	K

NOTES:

- 1.DISPLAY TYPE: STN
- 2.VIEWING DIRECTION: 6:00
- 3.POLARIZER MODE: TRANSFLECTIVE/POSITIVE
- 4.OPERATING TEMP: -10°C---+60°C
- 5.STORAGE TEMP: -20°C---+70°C
- 6.LCD OPERATING VOLTAGE:-----
- 7.DRIVE METHOD: 1/16DUTY 1/5BIAS
- 8.CONTROLLER: KS0066U
- 9.BACKLIGHT: LED
- 10.ALL UNMARKED TOLERANCES:±0.3mm
- 11.BEZEL (THICKNESS:0.6mm) IS TO BE PAINTED BLACK

北京中显电子有限公司, www.zxlcd.com					
绘图:		型号:	ZX1604ADYEYWD	单位:	mm
审核:		版号:	08V01	电话:	52926620
批准:		日期:		传真:	52926621