


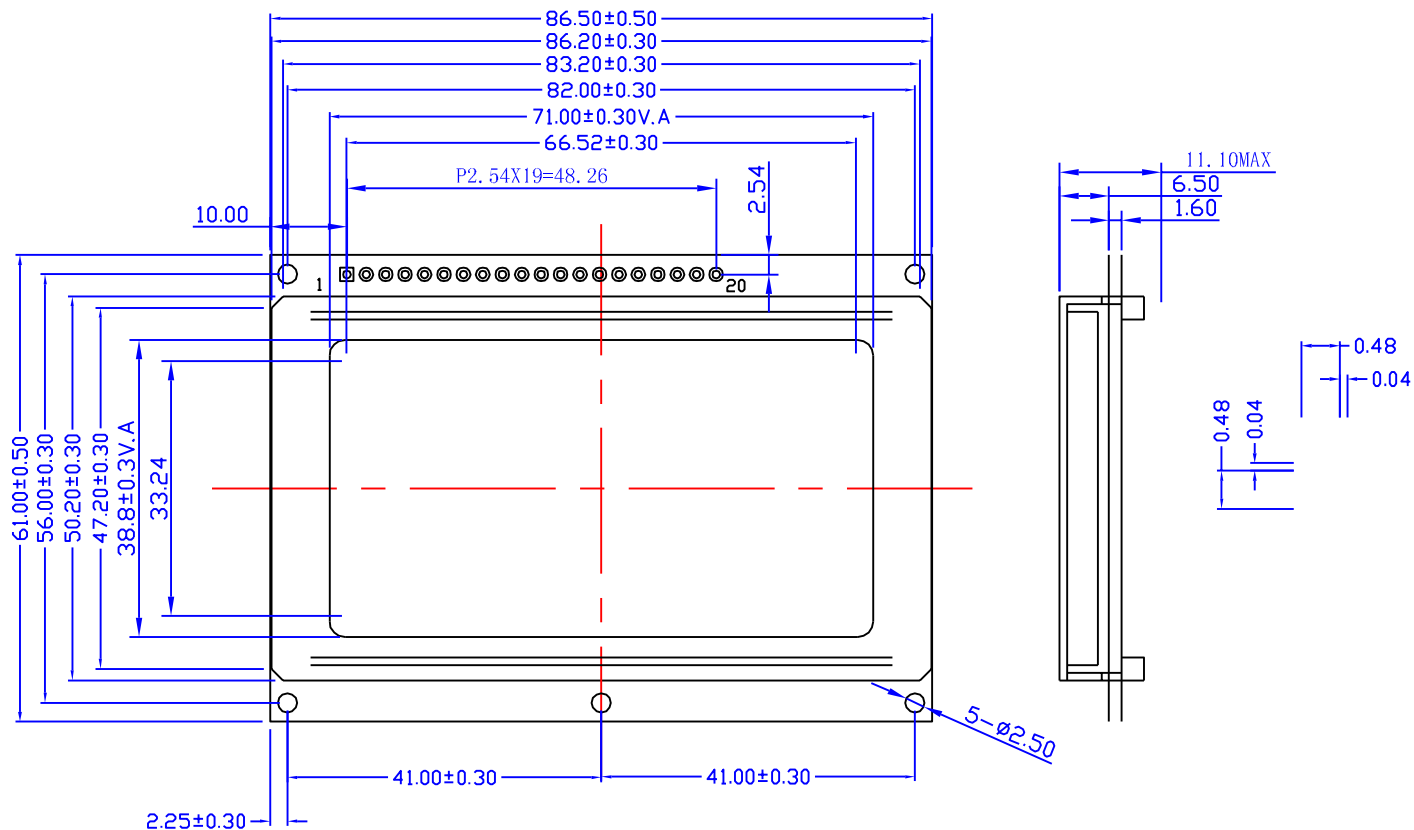

1	VSS
2	VDD
3	VLCD
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	CS1
16	CS2
17	/RES
18	VEE
19	A
20	K

NOTES:

- 1.DISPLAY TYPE: STN/YELLOW-GREEN
- 2.VIEWING DIRECTION: 6:00
- 3.POLARIZER MODE:TRANSFLECTIVE/POSITIVE
- 4.OPERATING TEMP: -10°C--+60°C
- 5.STORAGE TEMP: -20°C--+70°C
- 6.VDD: +5.0V
- 7.DRIVE METHOD: 1/64DUTY 1/9BIAS
- 8.CDNTRROLLER: KS0108B
- 9.BACKLIGHT TYPE: LED
- 10.ALL UNMARKED TOLERANCES: ±0.30mm

北京中显电子有限公司, www.zxlcd.com					
绘图:		型号:	ZX12864BDYEYWD	单位:	mm
审核:		版号:	08V01	电话:	52926620
批准:		日期:		传真:	52926621