

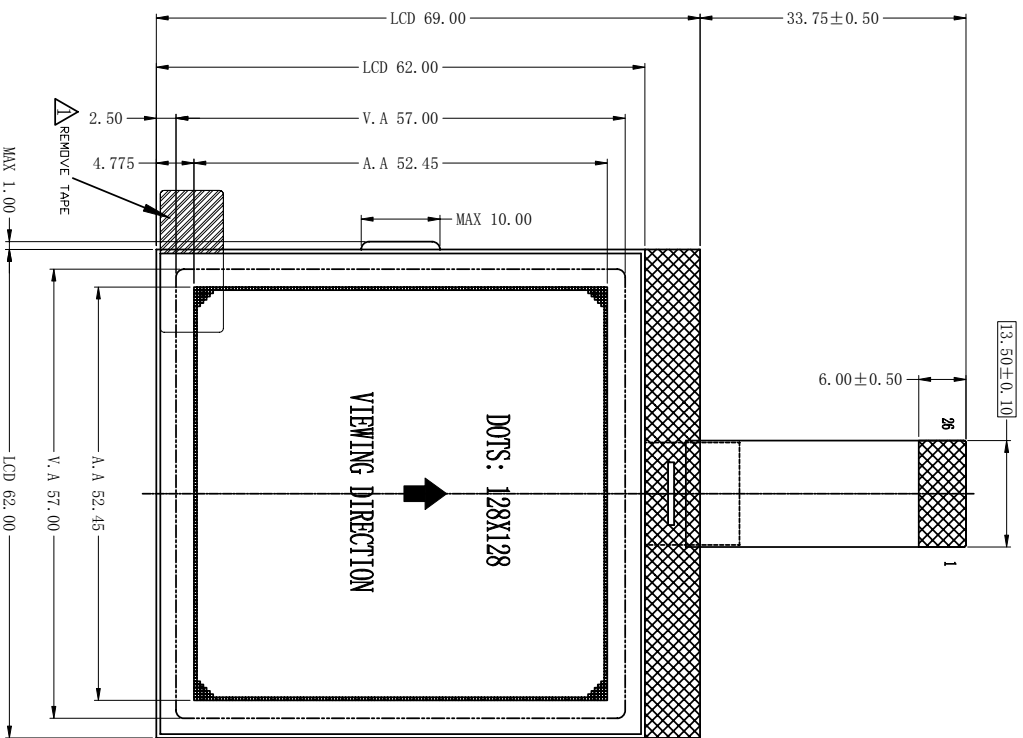


PIN	SYMBOL
1	V _{CD}
2	VB ₀ -
3	VB ₁ -
4	VB ₁ +
5	VB ₀ +
6	VDD
7	VSS
8	I _{D1}
9	I _{D0}
10	BM ₁
11	BM ₀
12	TS ₄
13	WR ₁
PIN	SYMBOL
14	W ₀
15	CD
16	CS ₀
17	RT
18	D ₇
19	D ₆
20	D ₅
21	D ₄
22	D ₃
23	D ₂
24	D ₁
25	D ₀
26	NC

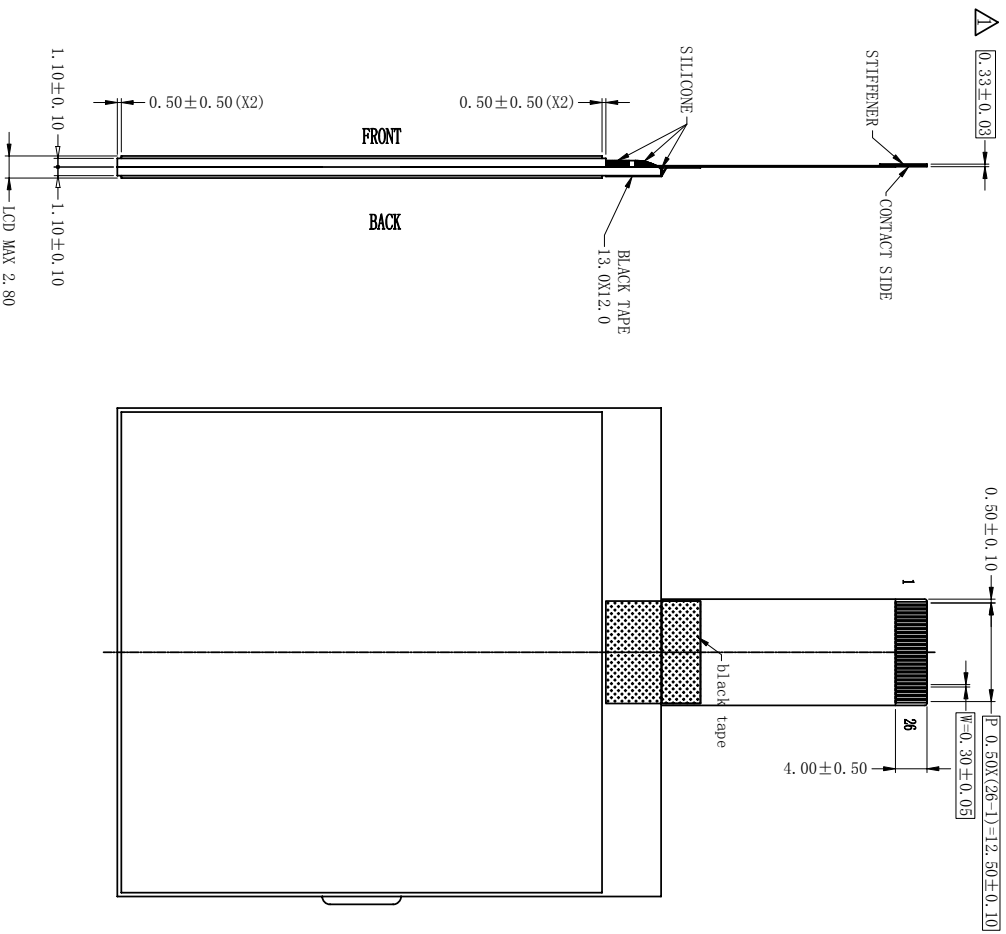

- | NOTES: | |
|---|---|
| 1. DISPLAY TYPE: | FS1N |
| 2. VIEWING DIRECTION: | 6:00 |
| 3. POLARIZER MODE: | TRANSFLACTIVE/POSITIVE |
| 4. OPERATING TEMP: | -20° C +70° C |
| 5. STORAGE TEMP: | -30° C +80° C |
| 6. LCD OPERATING VOLTAGE: | 1.3. 7V |
| 7. LOGIC VOLTAGE (VDD) : | 3. 0V |
| 8. DRIVE METHOD: | 1/128 DUTY 1/10 BIAS |
| 9. DRIVER: | UC1617W |
| 10. CONNECTOR | PFC |
| 11. UNMARKED TOLERANCES: | ± 0.3mm |
| 12. THE CONTROLLED DIMENSION MASK TO BE |  |
| 13. THE REQUIREMENT ON ENVIRONMENTAL PROTECTION: RoHS |  |



DOTS SIZE SCALE: 20:1

G-2	CHANGE STIFFENER THICKNESS AND DRIVE METHOD. ADD MOVE TAPE	09-11-20
G-1	NEW ISSUE	09-10-13

DRAWN BY: ME CHECKED BY: EE CHECKED BY: CONFIRMED BY:	TMI2812811CIWGN A		
	NO: G-2	SCALE:	
		UNIT: mm	
		SHEET NO: 1 OF 1	